

**VITI TESTA CILINDRICA BASSA E FORO GUIDA
CON CAVA ESAGONALE**

ISO


UNI

DIN

-

-

6912

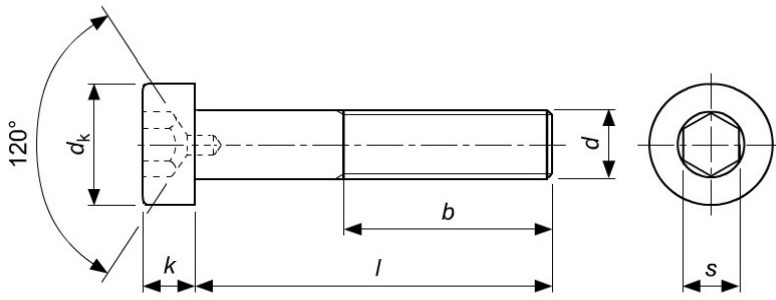

Materiale : **Acciaio bonificato**

Classe : **8.8**

Filettatura : **passo GROSSO**



Pesi per 1.000 Pz.

| d (MA) | M4 | M 5 | M 6 | M 8 | M 10 | M 12 | M 14 | M 16 | M 18 | M 20 |
|----------|-----|-----|------|------|------|------|------|------|------|------|
| passo | 0,7 | 0,8 | 1,0 | 1,3 | 1,5 | 1,75 | 2,0 | 2,0 | 2,5 | 2,5 |
| dk | 7,0 | 8,5 | 10,0 | 13,0 | 16,0 | 18,0 | 21,0 | 24,0 | 27,0 | 30,0 |
| k | 2,8 | 3,5 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 |
| s | 2,5 | 3 | 4 | 5 | 7 | 8 | 10 | 12 | 12 | 14 |
| b | 14 | 16 | 18 | 22 | 26 | 30 | 34 | 38 | 42 | 46 |

| nom | min. | max. | 4 | 5 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 |
|-----|-------|-------|------|------|-------|-------|------|-------|-------|-------|-------|-------|
| 8 | 7,71 | 8,29 | 1,00 | 1,90 | | | | | | | | |
| 10 | 9,71 | 10,29 | 1,30 | 2,20 | 3,60 | | | | | | | |
| 12 | 11,65 | 12,35 | 1,50 | 2,50 | 3,90 | 7,77 | | | | | | |
| 14 | 13,65 | 14,35 | 1,70 | 2,80 | 4,20 | 8,20 | | | | | | |
| 16 | 15,65 | 16,35 | 1,90 | 3,10 | 4,50 | 8,80 | 15,5 | | | | | |
| 18 | 17,58 | 18,42 | 2,10 | 3,40 | 4,80 | 9,40 | 16,5 | | | | | |
| 20 | 19,58 | 20,42 | 2,30 | 3,70 | 5,20 | 10,20 | 17,9 | 25,5 | | | | |
| 25 | 24,58 | 25,42 | 2,70 | 4,40 | 6,20 | 12,50 | 20,2 | 29,5 | 42,5 | 56,5 | | |
| 30 | 29,58 | 30,42 | 3,20 | 5,10 | 7,30 | 14,00 | 22,0 | 32,5 | 48,0 | 63,0 | 84,6 | 108 |
| 35 | 34,5 | 35,5 | 3,40 | 5,80 | 8,30 | 15,70 | 25,5 | 36,5 | 53,0 | 69,7 | 93,3 | 118 |
| 40 | 39,5 | 40,5 | 4,20 | 6,60 | 9,50 | 17,50 | 28,5 | 40,0 | 58,0 | 78,7 | 102,0 | 128 |
| 45 | 44,5 | 45,5 | 4,70 | 7,30 | 10,50 | 19,30 | 31,6 | 45,0 | 63,5 | 85,1 | 110,5 | 139 |
| 50 | 49,5 | 50,5 | | 7,90 | 11,50 | 21,50 | 34,8 | 50,0 | 69,5 | 91,5 | 119,0 | 150 |
| 55 | 54,4 | 55,6 | | | 12,50 | 23,30 | 37,9 | 54,0 | 75,5 | 99,5 | 128,5 | 161 |
| 60 | 59,4 | 60,6 | | | 13,60 | 25,30 | 40,3 | 57,0 | 82,0 | 107,0 | 138,0 | 172 |
| 70 | 69,4 | 70,6 | | | 14,20 | 29,10 | 16,0 | 65,0 | 92,5 | 122,0 | 157,0 | 196 |
| 80 | 79,4 | 80,6 | | | | 32,80 | 52,5 | 75,0 | 104,0 | 140,0 | 178,0 | 222 |
| 90 | 34,5 | 35,5 | | | | 36,00 | 57,8 | 82,6 | 116,0 | 154,0 | 196,0 | 245 |
| 100 | 39,5 | 40,5 | | | | 40,00 | 65,0 | 92,0 | 127,0 | 169,0 | 215,0 | 269 |
| 110 | 44,5 | 45,5 | | | | | 70,0 | 100,0 | 139,0 | 183,0 | 235,0 | 292 |
| 120 | 49,5 | 50,5 | | | | | 76,0 | 108,0 | 151,0 | 198,0 | 255,0 | 316 |
| 130 | 54,4 | 55,6 | | | | | | 116,0 | 163,0 | 212,0 | 275,0 | 342 |
| 140 | 59,4 | 60,6 | | | | | | 124,0 | 175,0 | 226,0 | 295,0 | 368 |
| 150 | 69,4 | 70,6 | | | | | | 132,0 | 187,0 | 240,0 | 315,0 | 394 |
| 160 | 79,4 | 80,6 | | | | | | 140,0 | 197,0 | 254,0 | 335,0 | 410,0 |

L = Lunghezza sotto testa millimetri