


**VITI TESTA ESAGONALE
CON FLANGIA ZIGRINATA**

**ISO
1665**

**UNI / DIN
*EN ISO 1665**

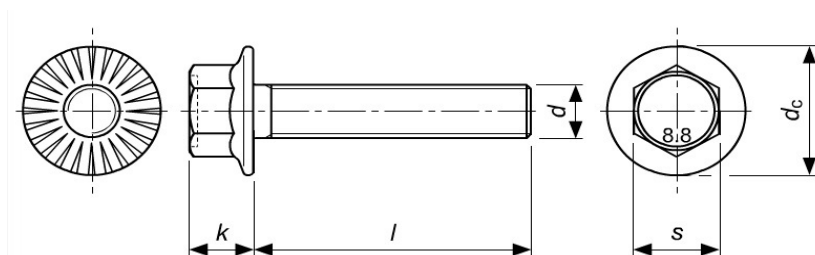

Materiale : **Acciaio**
Classe : **8.8**
Passo : **Grosso**



Pesi per 1.000 Pz.

d	M 4	M 5	M 6	M 8	M 10	M 12
Passo	0,70	0,80	1,00	1,25	1,50	1,50
s	7	8	10	13	15	15
k max	4,0	4,8	5,5	7,4	9,1	9,1
dc max	9,5	11,8	14,2	18,0	22,3	22,3

nom	min.	max.	M 4	M 5	M 6	M 8	M 10	M 12
8	7,70	8,30	1,99	3,45	5,84			
10	9,70	10,30	2,14	3,70	6,18			
12	11,65	12,35	2,30	3,94	6,52	12,70		
14	13,65	14,35	2,45	4,19	6,87	13,30		
16	15,65	16,35	2,60	4,44	7,21	14,00		
18	17,65	18,35	2,76	4,69	7,56	14,60		
20	19,60	20,40	2,91	4,95	7,90	15,20	27,70	43,20
22	21,58	22,42	3,06	5,20	8,25	15,80	25,70	45,20
25	24,60	25,40	3,30	6,40	8,95	16,70	30,00	46,60
30	29,60	30,40	3,69	7,20	11,00	21,70	31,60	50,00
35	34,50	35,50			12,00	23,70	36,00	53,40
40	39,50	40,50			13,30	25,70	42,40	63,00
45	44,50	45,50			14,50	27,50	45,40	72,00
50	49,50	50,50			15,50	29,50	48,50	76,00

L = Lunghezza sotto testa millimetri

Note :

*EN ISO 1665 ex norma DIN6921.