


VITI AUTOPERFORANTI TESTA SVASATA PIANA
IMPRONTA A CROCE

ISO
15482

UNI / DIN
***EN ISO 15482**

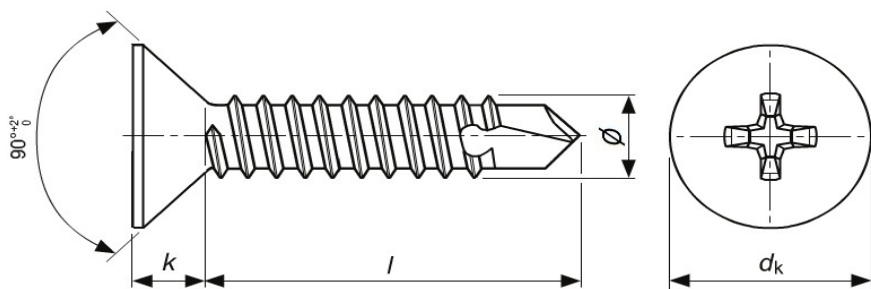

Materiale : **Acciaio cementato**

Classe : **C15**

Filettatura : **Secondo norma UNI 8115**



Pesi per 1.000 Pz.

Ø nom. (dn)	2,9	3,5	3,9	4,2	4,8	5,5	6,3	
Passo	1,1	1,3	1,4	1,4	1,6	1,8	1,8	
k ~	1,70	2,10	2,30	2,50	3,00	3,40	3,80	
dk	min.	5,20	6,44	7,14	7,44	9,14	10,37	11,97
	max.	5,6	6,9	7,5	8,2	9,5	10,8	12,5
Inserto Phillips n°	1	2	2	2	2	3	3	

L = Lunghezza compresa la testa millimetri

nom	min.	max.	2,9	3,5	3,9	4,2	4,8	5,5	6,3
13	12,10	13,90	0,48	0,72	0,91	1,10			
16	15,10	16,90	0,59	0,88	1,09	1,30	1,60	2,50	
19	17,90	20,00	0,70	1,10	1,30	1,50	1,80	2,80	3,60
22	20,90	23,00	0,90	1,20	1,45	1,70	2,40	3,30	4,15
25	23,90	26,00	1,00	1,40	1,65	1,90	2,70	3,70	4,70
32	30,70	33,20			2,15	2,50	3,40	4,70	5,95
38	36,70	39,20					4,00	5,40	7,10
45	43,70	46,20					4,70		8,40
50	48,70	51,20					5,20		9,30

Note :

*EN ISO 15482 ex norma UNI 8119 - DIN 7504/P