


**VITI TESTA ESAGONALE  
CON FLANGIA ZIGRINATA**

**ISO  
1665**

**UNI / DIN  
\*EN ISO 1665**

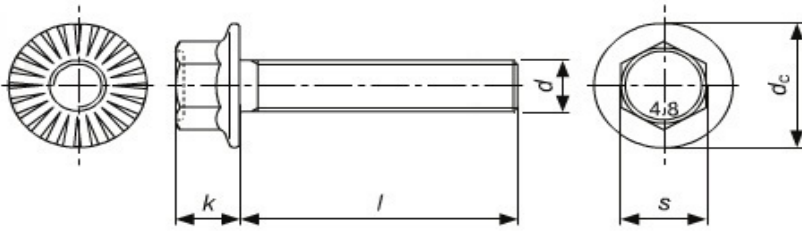

Materiale : **Acciaio**  
Classe : **4.8**  
Passo : **Grosso**



Pesi per 1.000 Pz.

	M 4	M 5	M 6	M 8	M 10
<b>d</b>					
<b>Passo</b>	0,70	0,80	1,00	1,25	1,50
<b>s</b>	7	8	10	13	15
<b>k max</b>	4,0	4,8	5,5	7,4	9,1
<b>dc max</b>	9,5	11,8	14,2	18,0	22,3

nom	min.	max.	M 4	M 5	M 6	M 8	M 10
<b>8</b>	7,70	8,30	1,99	3,45	5,84		
<b>10</b>	9,70	10,30	2,14	3,70	6,18		
<b>12</b>	11,65	12,35	2,30	3,94	6,52	12,70	
<b>14</b>	13,65	14,35	2,45	4,19	6,87	13,30	
<b>16</b>	15,65	16,35	2,60	4,44	7,21	14,00	
<b>20</b>	19,60	20,40	2,91	4,95	7,90	15,20	27,70
<b>25</b>	24,60	25,40	3,30	6,40	8,95	16,70	30,00
<b>30</b>	29,60	30,40	3,69	7,20	11,00	21,70	31,60
<b>35</b>	34,50	35,50			12,00	23,70	36,00
<b>40</b>	39,50	40,50			13,30	25,70	42,40
<b>45</b>	44,50	45,50			14,50	27,50	45,40
<b>50</b>	49,50	50,50			15,50	29,50	48,50

L = Lunghezza sotto testa millimetri

Note :

\*EN ISO 1665 ex norma DIN6921.