


**VITI TESTA CILINDRICA
IMPRONTA CACCIAVITE**

**ISO
1207**

**UNI
6107**

**DIN
84**

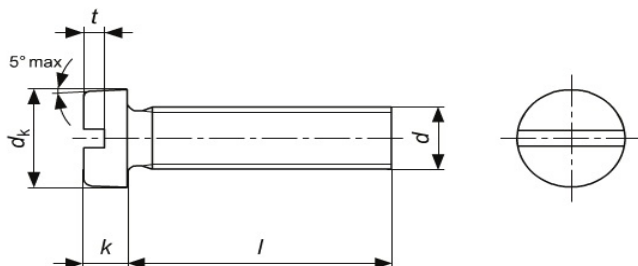

Materiale : **Acciaio**
Classe : **4.8**
Passo : **Grosso**



Pesi per 1.000 Pz.

d	M 3	M 4	M 5	M 6	M 8	M 10
Passo	0,50	0,70	0,80	1,00	1,25	1,50
dk	6	8	10	12	16	20
t	0,7	1	1,2	1,4	1,9	2,4
K	1,65	2,20	2,50	3,00	4,00	5,00

nom	min.	max.	M 3	M 4	M 5	M 6	M 8	M 10
4	3,75	4,25						
5	4,75	5,25	0,335					
6	5,75	6,25	0,379	0,754				
8	7,70	8,30	0,467	0,910	1,450			
10	9,70	10,30	0,555	1,060	1,700	2,540		
12	11,65	12,35	0,643	1,220	1,950	2,890	5,670	
14	13,65	14,35	0,731	1,370	2,190	3,250	6,300	
16	15,65	16,35	0,820	1,530	2,440	3,600	6,940	11,600
20	19,60	20,40	0,996	1,840	2,940	4,310	8,210	13,600
25	24,60	25,40	1,220	2,220	3,550	5,190	9,790	16,100
30	29,60	30,40	1,440	2,610	4,160	6,080	11,400	18,600
35	34,50	35,50	1,660	3,000	4,770	6,970	13,010	21,100
40	39,50	40,50	1,880	3,380	5,400	7,840	14,600	23,600
45	44,50	45,50	2,100	3,770	6,020	8,730	16,200	26,100
50	49,50	50,50	2,320	4,160	6,650	9,610	17,800	28,600
55	54,00	56,00		4,550	7,280	10,590	19,400	31,100
60	59,00	61,00		4,940	7,910	11,470	21,000	33,600
70	69,00	71,00			9,170	13,330	24,200	38,600

L = Lunghezza sotto testa millimetri